

SYSTEMS

SCANRAY D

Real-time dynamic digital radiography system




SCANRAY D is a digital radiography system designed for direct X-ray inspection using dynamic flat-panel detector technology. It is intended for stationary radiographic installations, including X-ray cabinets and radiographic testing systems where continuous digital image acquisition is required.

The SCANRAY D series includes dynamic flat-panel detectors in multiple sizes, allowing the system to be configured for a wide range of inspection tasks and object dimensions. The detectors operate with the DR-SOFT software platform, providing a unified digital environment for image acquisition and evaluation. Depending on the model, detector housings are manufactured from metal or durable plastic and feature a carbon fiber active surface for reliable operation in industrial environments.

Key features

- Real-time image acquisition enables live positioning and immediate evaluation during inspection.
- Integrated DR-SOFT software provides a unified workflow for image acquisition and evaluation.
- Internal detector memory prevents image loss during temporary communication interruptions.
- Ideal for automated inspection systems, X-ray cabinets and production lines where high throughput is required.
- Film-free workflow eliminates consumables and archive storage.
- Multiple binning modes with selectable frame rates optimize detector performance for different inspection tasks.
- Supplied as a complete solution including detector, workstation, DR-SOFT software and all required cables.

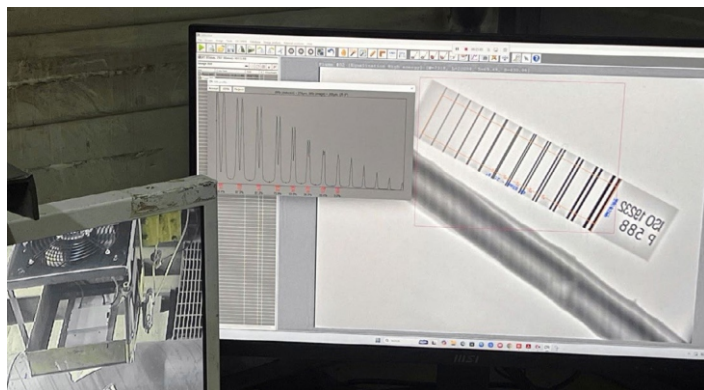

Specifications

PROPERTIES	1515D	1717D/DH	1724D/DH	2532D	4328D	4343D
Scintillator	Gadox/CsI					
Pixel pitch, μm	119	95	95	124	140	140
Image size, mm	152 × 152	170 × 170	170 × 243	254 × 317	430 × 287	430 × 430
Image size, inches	6.0 × 6.0	6.7 × 6.7	6.7 × 9.6	10.0 × 12.5	16.9 × 11.3	16.9 × 16.9
Pixel matrix, pixels	1280 × 1280	1792 × 1792	1792 × 2560	2048 × 2560	3072 × 2048	3072 × 3072
Dimensions, mm	196 × 181 × 50	210 × 197 × 45	210 × 270 × 45	285 × 343 × 45	470 × 330 × 45	471 × 471 × 35
Weight, kg	2.4	2.7	3.7	9.3	10.0	21.0-30.0
Frame rate (no binning), fps	34	28/80	28/60	22	14	15
Voltage range, kVp	40-450	40-250		40-450		
Operating environment, °C	+10 to +35	0 to +50		+10 to +35		
Grayscale, bits	16					

Authorised Distributor



INNOVATIVE TECHNOLOGIES
IN INDUSTRIAL RADIOGRAPHY
info@dr-systems.com
WWW.DR-SYSTEMS.COM



AK NDT & Industrial Supplies
PRECISION BEYOND MEASURE

Email: sales@ak-ndt.com

Web: www.ak-ndt.com